


Qualita 020E

Geolam[®]
Architectural Eco-Technology

Commercial Decking

Datasheet

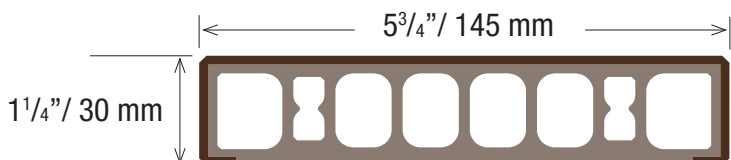

Thickness: 30 mm | 1 1/2 in

Width: 145 mm | 5 3/4 in

Section tolerances in mm: +0.5 / - 1.5

Technology: 2G, co-extruded

Surfaces finish: 1 side sanded

Standard length: 3.90m | 12ft 9in

Weight: 3.30 kg/lm | 2.22 lb/ft

Joist spacing: 60 cm | 24 in

Water absorption property:

Coefficient : 0.1%

Length (ratio of change): 0 %

Strength:

Bending strength: 35-40 Mpa

Charpy Impact: 6-7 KJ/m²

Young's modulus: 4500 Mpa

Temperature characteristics:

Bending strength: 101.7°C

Linear expansion coefficient:

4 x 10⁻⁵ (1/°C)

SAFETY

Volatile constituent (in mg/L):

Formaldehyde emission:

Min. < 0.1 | Max.< 0.1

Toxic substance elution:

Cd : < 0.01

Pb : < 0.01

Hg : < 0.0005

Se : < 0.01

As : < 0.01

Cr (VI) : < 0.05

Skid resistance (in CSR):

Dry : 0.70

Wet : 0.71

Wet plus Dust : 0.42


Antistatic:

Friction between urethane resin: < 2 KV

On demand: Low Temp[®] treatment.*

Surface temperature reduction from 5 to 10°C.

* Custom orders only

Standard Colors -  All standard colors stocked in the US, no minimum :



Teak



Moleskin



Rosewood



Ebony

Non-Standard Colors - 90 day lead time - Minimum order quantities apply:



Ivory



Blackwood

Custom Colors Available for orders >6,000 sq. ft.

www.geolaminc.com
Toll free: 1-877-627-3530
info@geolaminc.com